

ESD3Z SERIES

Surface Mount Uni-Directional TVS For ESD Protection Diode - 3.3V - 15V

Features

- This series is designed for average power 300W approximated ESD protection, different V_{RWM} , different peak pulse power available.
- Protects one I/O or power line.
- Low clamping voltage.
- Working voltages: 3.3V, 5.0V, 12V, 15V
- Low leakage current.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228
- Compliant to Halogen-free.

IEC compatibility

- IEC61000-4-2 (ESD) ± 30 kV (air), ± 25 kV (contact)
- IEC61000-4-4 (EFT) 40A (5/50 ns)


Applications

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Peripherals
- Pagers

Mechanical data

- Epoxy: UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-323
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Mounting Position : Any

Package outline

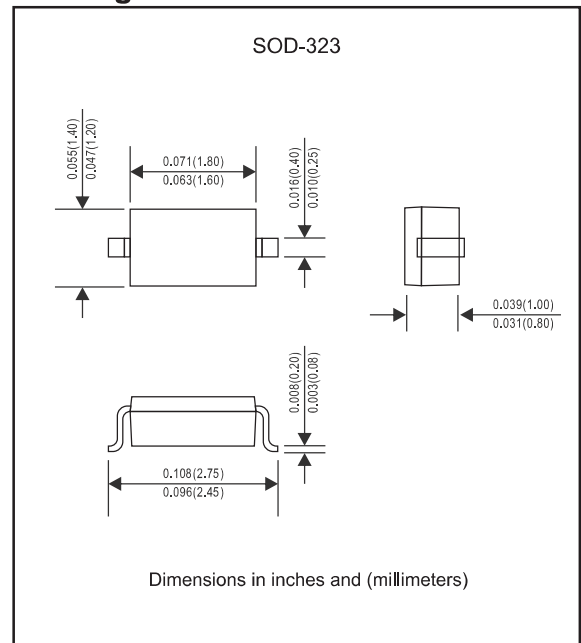

Maximum ratings (at $T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	VALUE	UNIT
Lead solder temperature-maximum	10 second duration	T_L	260	$^\circ\text{C}$
Operating junction temperature range		T_J	-55 to +125	$^\circ\text{C}$
Storage temperature range		T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical characteristics (at $T_A = 25^\circ\text{C}$ unless otherwise noted)


Part No.	V_{RWM} (V) (Max.)	I_R (μA) @ V_{RWM} (Max.)	V_{BR} (V) @ I_T (Note 2) (Min.)	I_T (mA)	V_C (V) @ $I_{PP} = 1.0\text{A}$ (Max.)	I_{PP} (A) (Max.)	V_C (V)(Note 1) @ Max I_{PP} (Max.)	P_{PK} (W) (Note 1) (Max.)	C_J (pF) (Typ.)
ESD3Z3.3	3.3	40	4.0	1.0	6.5	20.0	15.0	300	450
ESD3Z5.0	5.0	10	6.0	1.0	9.8	17.0	18.0	306	300
ESD3Z12	12	1	13.3	1.0	19.0	11.0	32.0	352	130
ESD3Z15	15	1	16	1.0	24.0	10.0	38.0	380	120

Notes 1: Surge current waveform per Fig.1

2: V_{BR} is measured with a pulse test current I_T at an ambient temperature of 25°C .

ESD3Z SERIES

Typical characteristics (at $T_A = 25^\circ\text{C}$ unless otherwise noted)

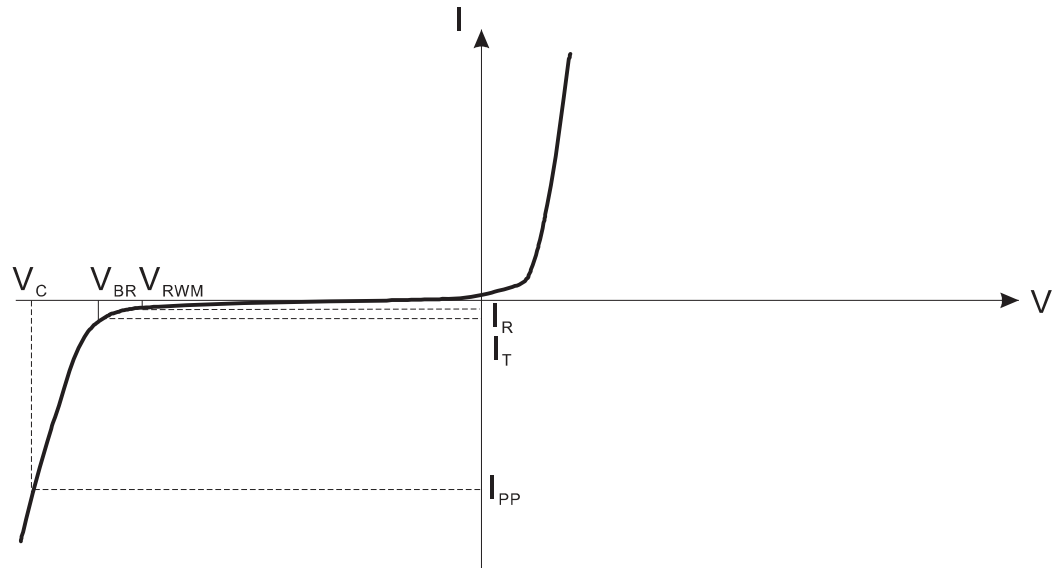

Uni-Directional TVS

V_C : Clamping voltage @ I_{PP}

I_{PP} : Maximum reverse peak pulse current

V_{RWM} : Maximum working peak reverse voltage

I_R : Maximum reverse leakage current @ V_{RWM}

V_{BR} : Breakdown voltage @ I_T

I_T : Test current

C_J : Max. capacitance @ $V_R = 0\text{V}$ and $f = 1\text{MHz}$

Rating and characteristic curves (ESD3Z SERIES)

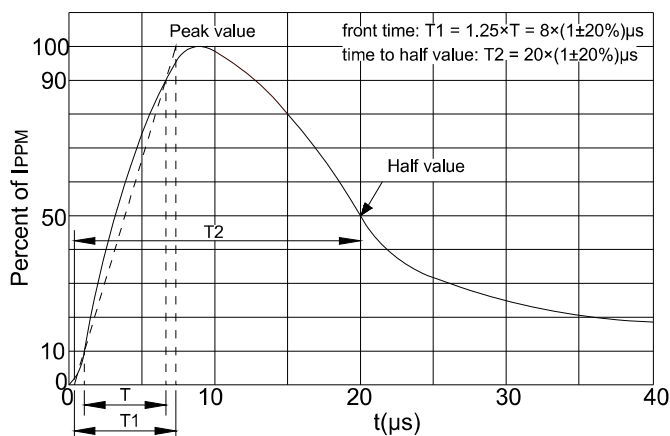


FIG.1: Pulse Waveform curve

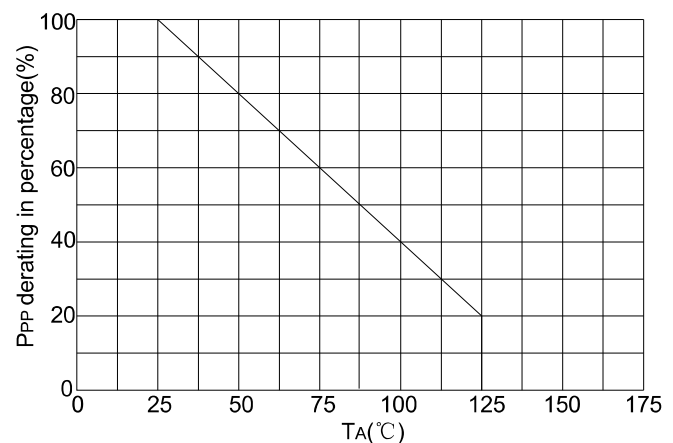


FIG.2: Pulse derating curve

ESD3Z SERIES


Pinning information

Pin	Simplified outline	Symbol
Uni-Directional Pin1 cathode Pin2 anode		

Marking

Type number	Marking code
ESD3Z3.3	03W/03
ESD3Z5.0	05W/D05
ESD3Z12	12W/D12
ESD3Z15	15W/D15

Suggested solder pad layout

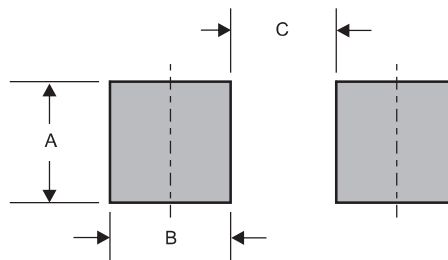

Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SOD-323	0.033 (0.83)	0.025 (0.63)	0.063 (1.60)